

hinge manipulator

up to 600 kg (1,322 lbs) load capacity



neptune evolution  
compact + robust hinge

**esmo**  
semicon

# key features

touch-screen-operated user interface

fully motorized

intuitive menu navigation + detailed display information

password-protected control options for operator + docking modes

SD card function for remote maintenance measures + software updates

z-axis tactility adjustment based on customer specifications

fully automated work sequences + individual docking height settings

direct connection to prober

linear, vertical motions for linear docking | linear footing (optional)

cable management (optional)


twist/tumble motion (optional)

tactile test head mounting for stress-free docking

two-button operation

programmable docking configurations

compatible with a wide range of test heads applicable to all available probes in the market

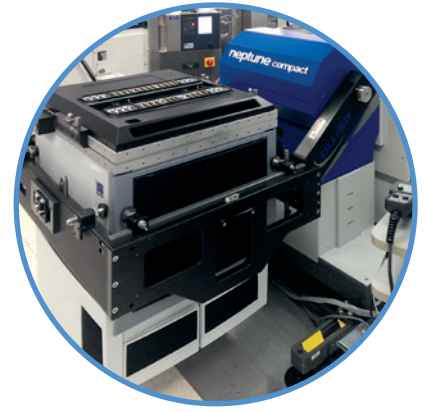

GERMAN  
ENGINEERING



GLOBAL  
SOLUTIONS



Please  
get in touch  
with us.

## **esmo Germany Rosenheim**

esmo AG  
Brueckenstrasse 1  
83022 Rosenheim  
Germany

Phone +49 (8031) 233 88 0  
Fax +49 (8031) 233 88 10  
sales@esmo-ag.com

## **esmo USA Sacramento**

esmo USA Corp.  
1020 Winding Creek Road  
Suite #120  
Roseville, California 95678  
USA

Phone +1 (916) 307 6345  
Fax +1 (916) 307 6341  
sales@esmo-usa.com

## **esmo Singapore Singapore**

esmo Asia Pte. Ltd.  
12 Tai Seng Link  
#06 - 01  
Singapore 534233  
Singapore

Phone +65 (656) 288 57  
Fax +65 (656) 288 60  
sales@esmo-asia.com

## **esmo China Shanghai**

esmo Asia North Co. Ltd.  
Building 2, No. 388 Xinrun Road  
Xin Qiao Industrial Zone  
Song Jiang District  
201612 Shanghai  
China

Phone +86 (21) 5768 7228 + ext. 201  
Fax +86 (21) 5768 7132  
info@esmo-ag.com.cn