

universal manipulator

up to 500 kg (1,100 lbs) load capacity



orion / pluto
motion-sensitive
all-rounder

esmo
semicon

key features

power-assisted motions for all axes

optimized footprint for various test heads

various linear footing versions

force deactivation feature ensuring operator safety and protecting equipment during set-up

left / right swing configurations


numerous additional, unique features for individual set-up requirements

choice of compatible test heads:

- Advantest T2000LS / T5581 / T5671 / T6672 / T6673
- Teradyne FLEX / microFLEX / ultraFLEX / J750 / Catalyst
- Credence SZ 3650
- LTX-C Fusion EX/MX
- Nextest Magnum SV
- Verigy V93K CTH/STH
- Agilent 4082F
- Spea C430MX
- and many more on request

specifications

ultra-short footing:	220 mm (8.7")	manual / motorized
short footing:	550 mm (21.7")	manual / motorized
long footing:	1,070 mm (42.1")	manual / motorized
vertical travel:	1,160 mm (45.7")	manual / motorized
swing:	+20° / -100°	manual
in/out:	+/- 100 mm (3.9")	manual
tumble:	185°	manual
twist:	360°	manual / motorized
theta adjustment:	2.5°	manual
max. test head weight:	500 kg (1,100 lbs)	

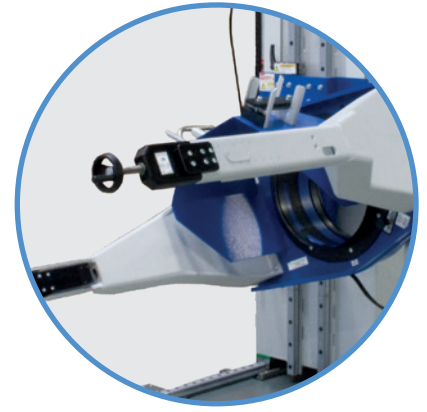

GERMAN
ENGINEERING
●●●
GLOBAL
SOLUTIONS



Please
get in touch
with us.

esmo Germany Rosenheim

esmo AG
Brueckenstrasse 1
83022 Rosenheim
Germany

Phone +49 (8031) 233 88 0
Fax +49 (8031) 233 88 10
sales@esmo-ag.com

esmo USA Sacramento

esmo USA Corp.
1020 Winding Creek Road
Suite #120
Roseville, California 95678
USA

Phone +1 (916) 307 6345
Fax +1 (916) 307 6341
sales@esmo-usa.com

esmo Singapore Singapore

esmo Asia Pte. Ltd.
12 Tai Seng Link
#06 - 01
Singapore 534233
Singapore

Phone +65 (656) 288 57
Fax +65 (656) 288 60
sales@esmo-asia.com

esmo China Shanghai

esmo Asia North Co. Ltd.
Building 2, No. 388 Xinrun Road
Xin Qiao Industrial Zone
Song Jiang District
201612 Shanghai
China

Phone +86 (21) 5768 7228 + ext. 201
Fax +86 (21) 5768 7132
info@esmo-ag.com.cn